
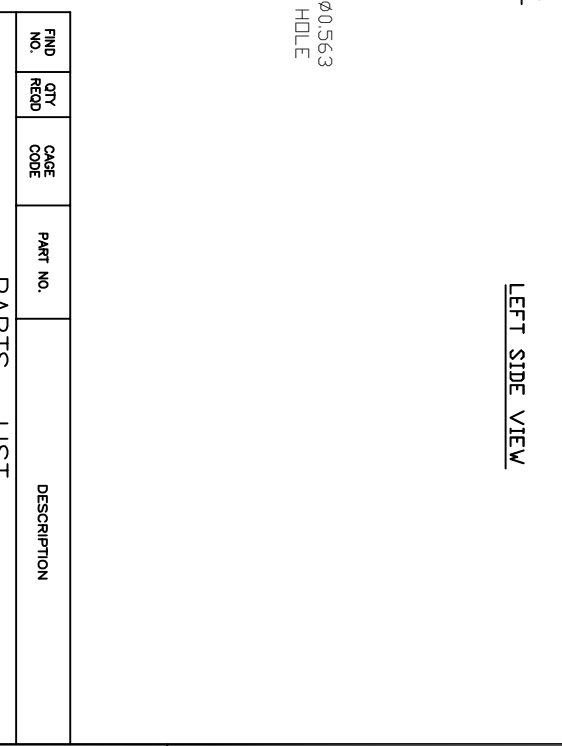
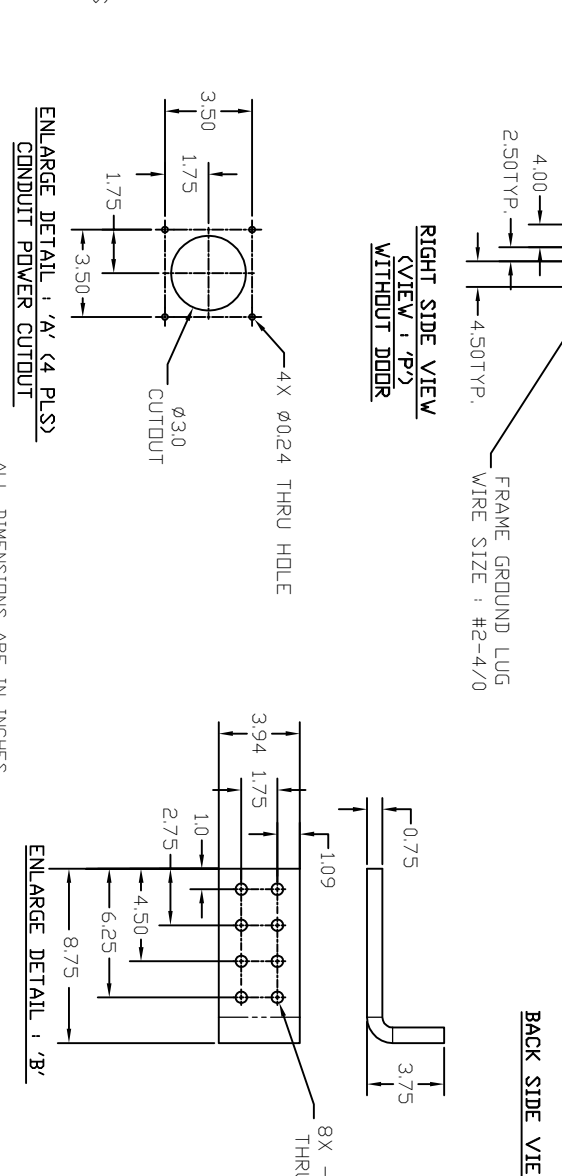
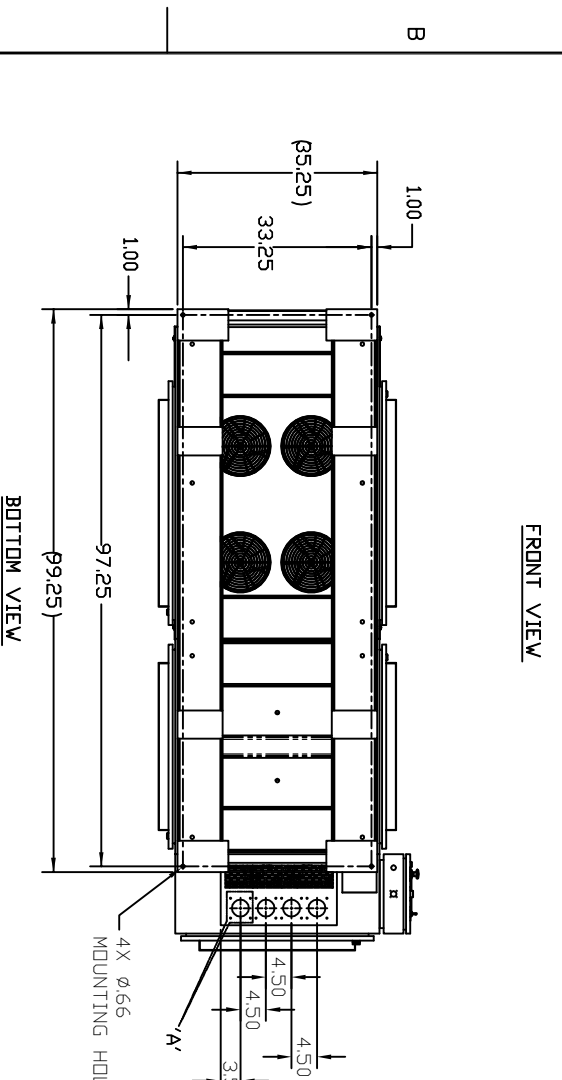
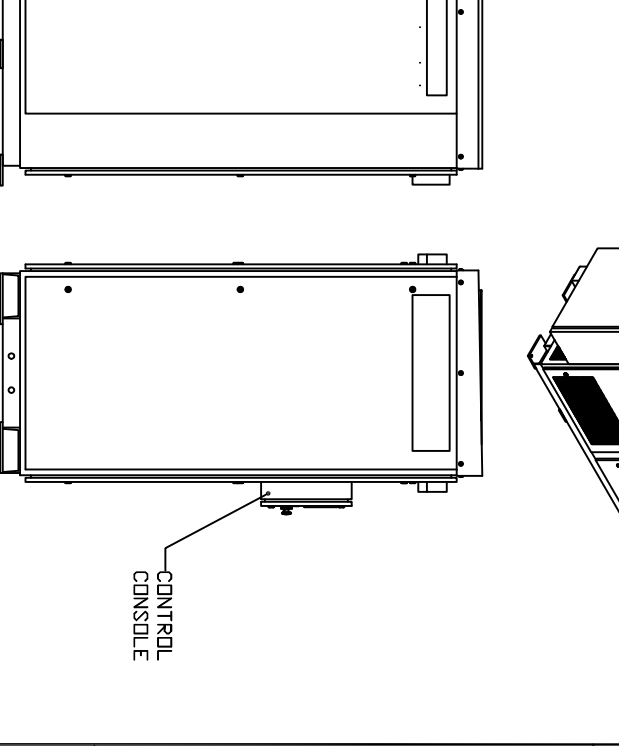
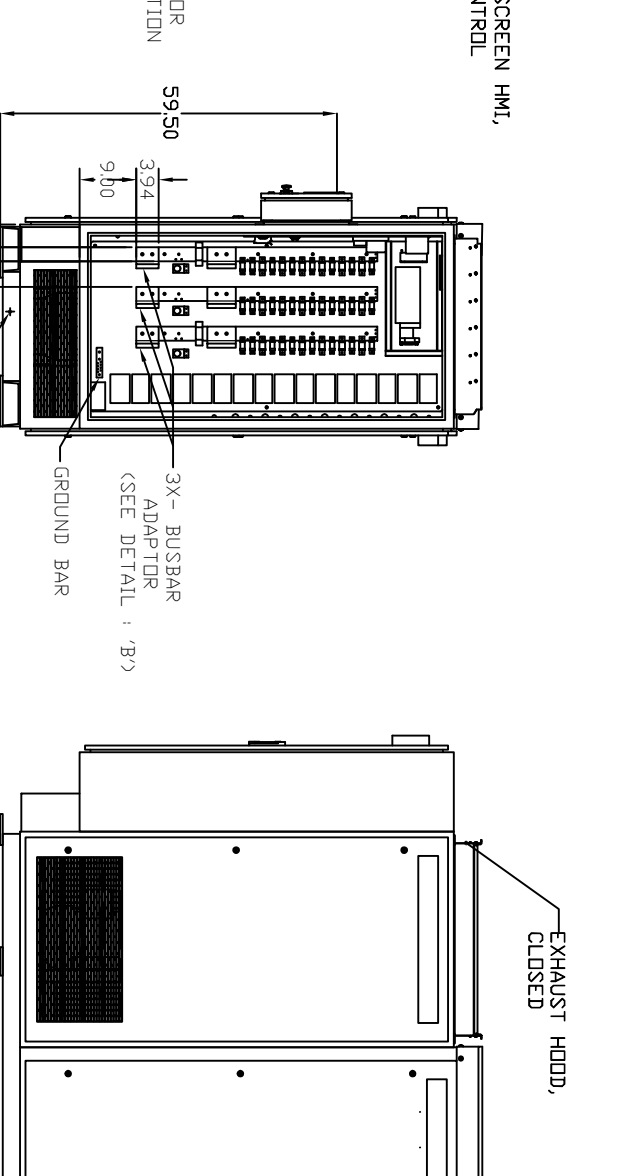
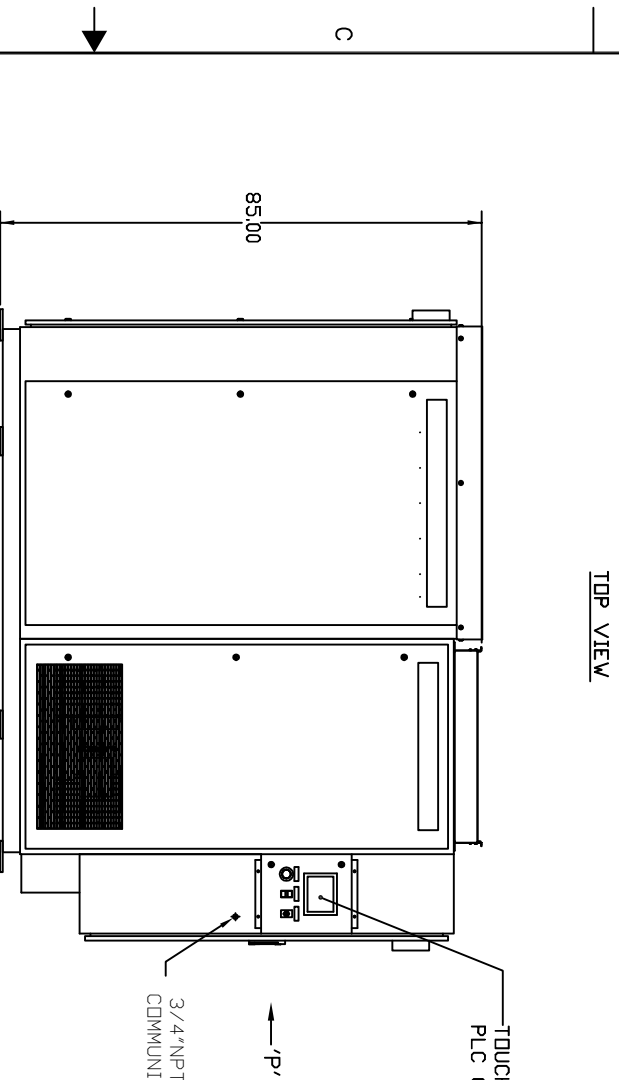


ZONE	LTR.	DESCRIPTION	DATE	APPROVED

SPECIFICATION - MODEL NUMBER ULB-RL1500-480-DS

CAPACITY	1500KVA (0.8 POWER FACTOR LAGGING), 1200KW, 900KVAR
VOLTAGE	480 VAC
FREQUENCY	60HZ
LOAD STEPS	50KW RESISTIVE, 75KVAR REACTIVE
DUTY CYCLE	CONTINUOUS
MAX. AMBIENT TEMPERATURE	120°F
MAX EXHAUST TEMP, RIZE	150-200°F, HOT SPOTS 550°F
AIR FLOW	20,000 CFM (RESISTIVE SECTION) 4500 CFM (REACTIVE SECTION)
FAN/CONTROL VOLTAGE	EXTERNAL 480VAC, 3-PHASE, 60 HZ
APPROX WEIGHT	8825 LBS / 4000 KG.

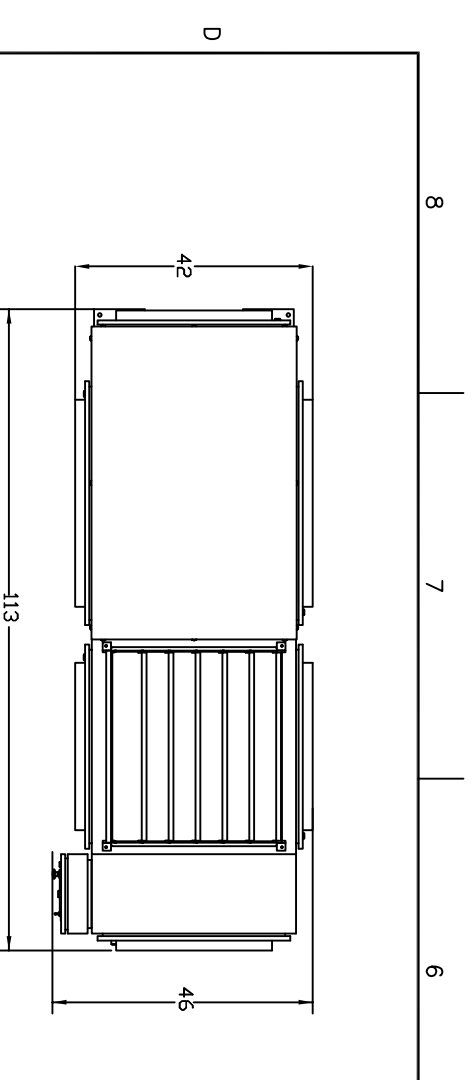

ALL DIMENSIONS ARE IN INCHES.

FINISH	MATERIAL	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: DIMENSIONS ± 1/8 2 PLACE DECIMALS ± .03 3 PLACE DECIMALS ± .010
	ASSEMBLY	

CONFIDENTIAL/PROPRIETARY

THIS DOCUMENT CONTAINS THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF ULB. YOU MAY NOT POSSESS, USE, COPY OR DISCLOSE THIS DOCUMENT OR ANY INFORMATION IN IT FOR ANY PURPOSE WITHOUT EXPRESS WRITTEN PERMISSION. NEITHER RECEIPT, FROM ANY SOURCE, NOR POSSESSION OF THIS DOCUMENT, CONSTITUTES SUCH PERMISSION. PERMISSION, USE, COPYING OR DISCLOSURE BY ANYONE WITHOUT EXPRESS WRITTEN PERMISSION OF ULB IS NOT AUTHORIZED AND MAY RESULT IN CRIMINAL AND/OR CIVIL LIABILITY.

PARTS LIST

FIND NO.	QTY	RECD	CAGE CODE	PART NO.	DESCRIPTION

APPROVALS	DATE	UNIVERSAL LOAD BANKS
DRAWN: JP		ULB UNIVERSAL LOAD BANKS 1500KVA LOADBANK ULB-RL1500-480-DS
CHECKED: ENGR.		
QUAL. REL.		
CONTRACT NUMBER		

20207012	SIZE	CAGE CODE
DO NOT SCALE DRAWING	D	8LKM0
	SCALE	WEIGHT
		A203008-P0