

D

C

B

A

REV:0

10 April 2025

A53001-P51



B

A

SPECIFICATIONS:

CAPACITY	500 KW
VOLTAGE	415V, 3PH
FREQUENCY	50/60 HZ
LOAD STEPS	5 KW RESOLUTION STANDARD
DUTY CYCLE	CONTINUOUS
MAX. AMBIENT TEMPRATURE	120 °F
COOLING SYSTEM	LIQUID COOLED SYSTEM
TEMPRATURE RATING	50°F TO 120°F
CONTROL VOLTAGE	LOAD CONTROL CIRCUITS OPERATE AT 120V VIA INTERNAL TRANSFORMER OR THROUGHT EXTERNAL 120V POWER
APPROX. WEIGHT	1350 KG, (2975 LBS)
ENCLOSURE TYPE	INDOOR

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

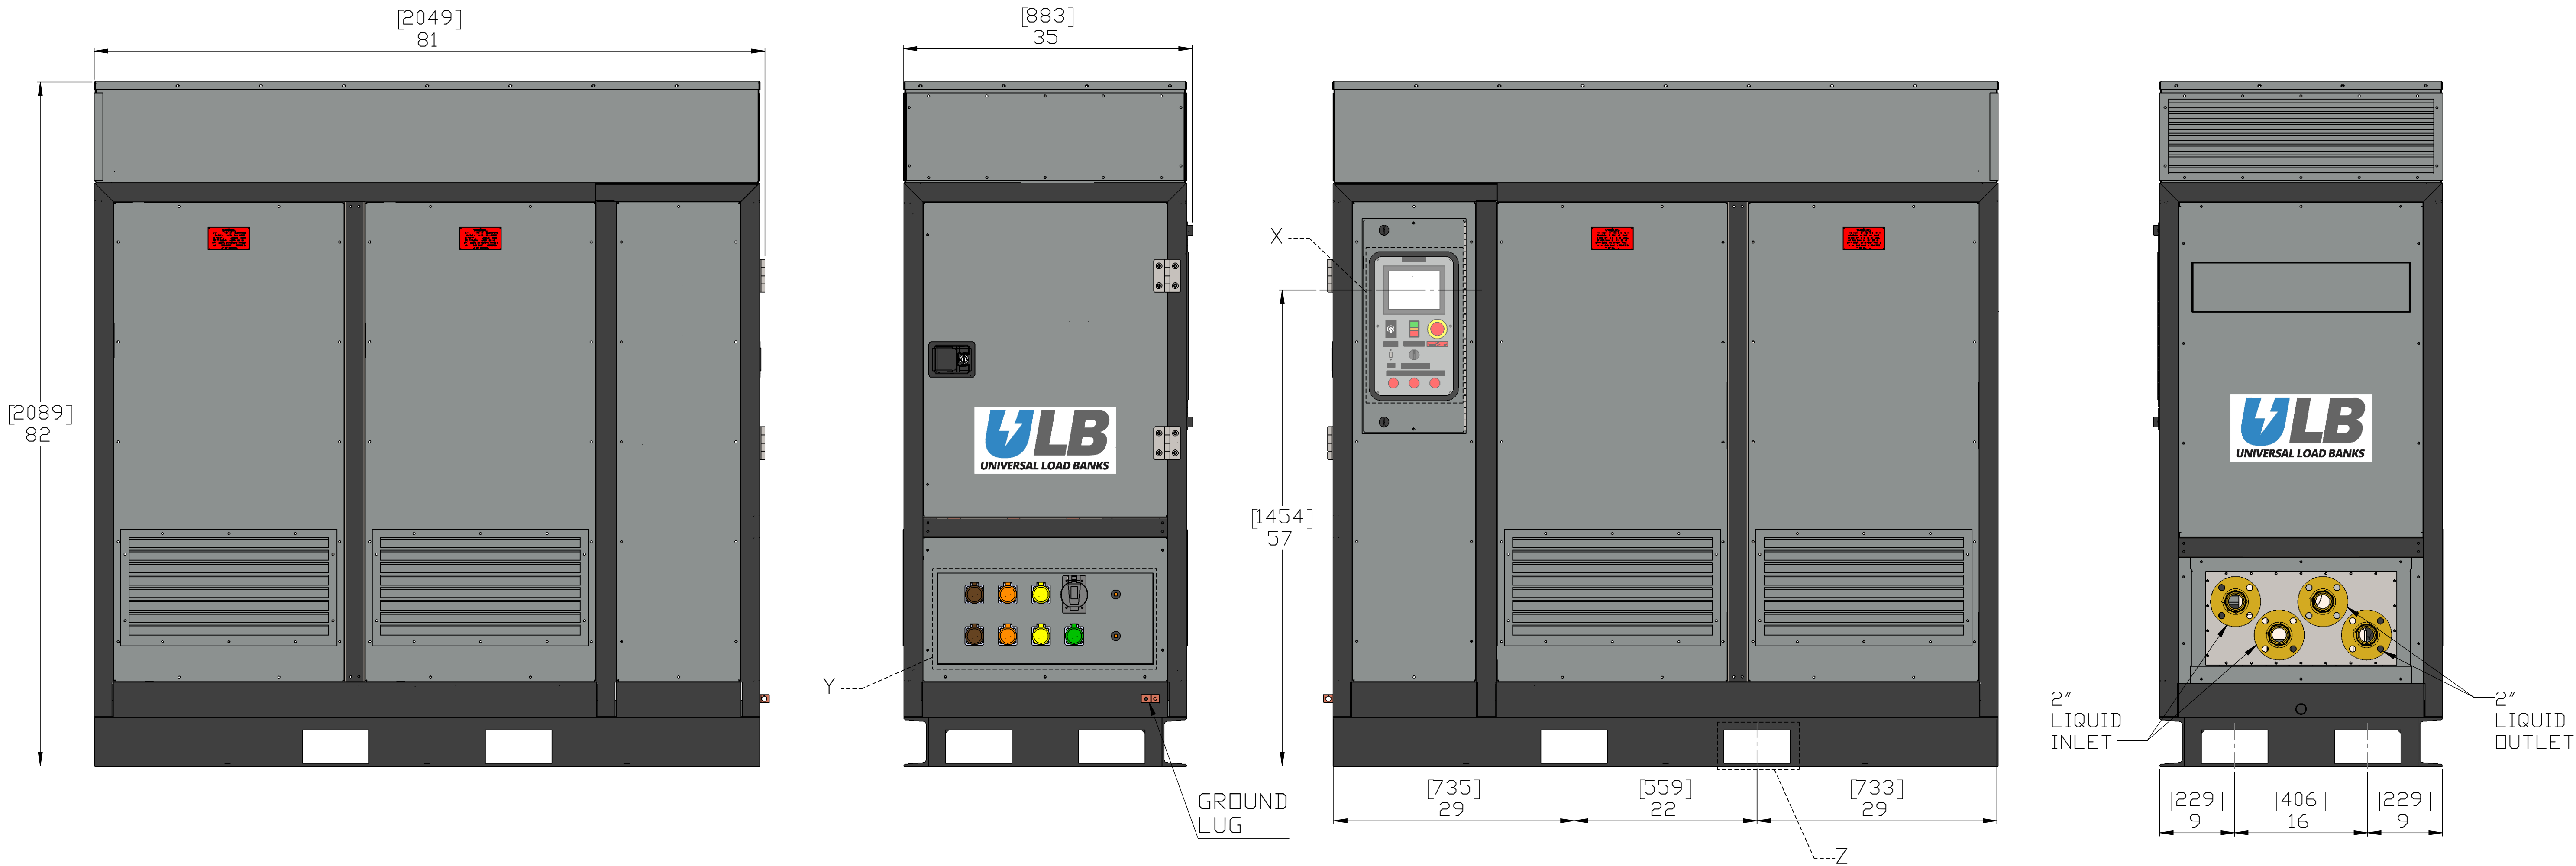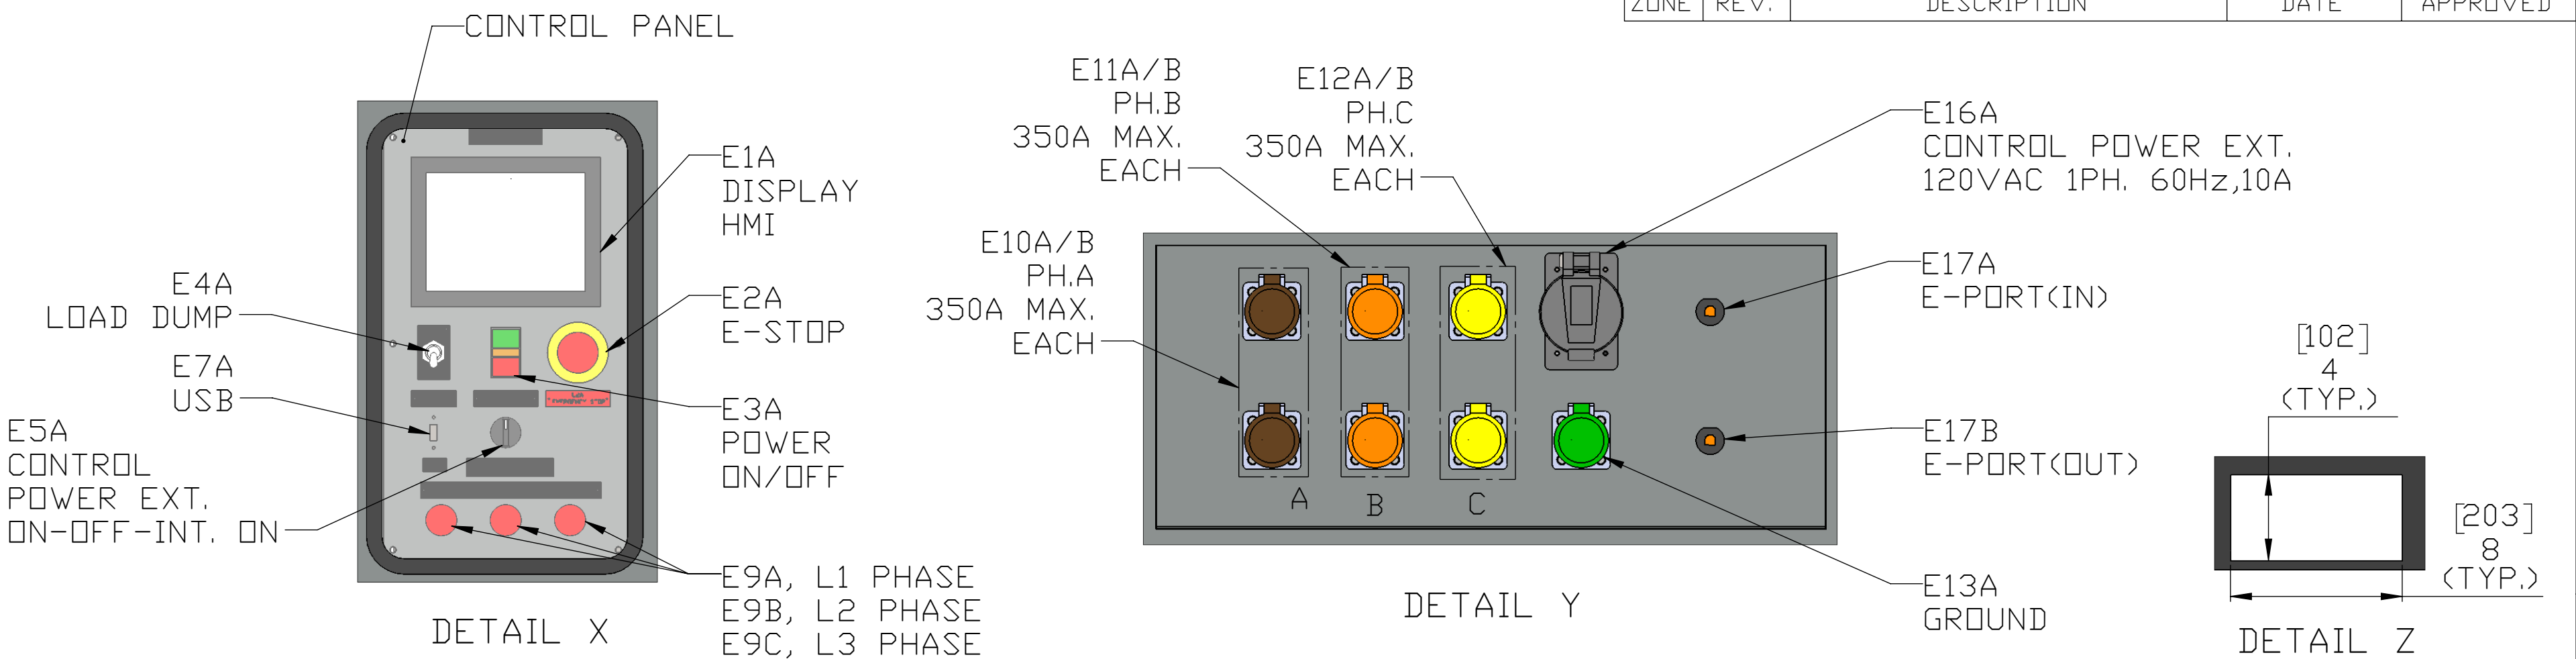

LIQUID COOLED, MODEL ULB-R500L-415-LWT-IS (500 KW, INDOOR STATIONARY)

PATENT PENDING

- NOTES :-
- ALL DIMENSIONS ARE IN INCHES AND [mm].
 - ALL DIMENSIONS ARE APPROX.
 - POWDER COAT USING DTOV2 POWDER CATEGORY DFT: MINIMUM 80 MICRON.

FINISH POWDER COATED RAL 7042/RAL 9004/RAL 6037/ RAL 5005		MATERIAL ASSEMBLY		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES(MM) TOLERANCES:FRACTIONS ± 1/4" ANGLES ± 0° 30' 2 PLACE DECIMALS ± .03 3 PLACE DECIMALS ± .010		APPROVALS DRAWN KC 22-10-24 CHECKED TP 22-10-24 ENGR. TP 22-10-24 QUAL. REL.		DATE		 UNIVERSAL LOAD BANKS	
CONFIDENTIAL/PROPRIETARY THIS DOCUMENT CONTAINS THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF ULB. YOU MAY NOT POSSESS, USE, COPY OR DISCLOSE THIS DOCUMENT OR ANY INFORMATION IN IT FOR ANY PURPOSE WITHOUT EXPRESS WRITTEN PERMISSION. NEITHER RECEIPT, FROM ANY SOURCE, NOR POSSESSION OF THIS DOCUMENT, CONSTITUTES SUCH PERMISSION. POSSESSION, USE, COPYING OR DISCLOSURE BY ANYONE WITHOUT EXPRESS WRITTEN PERMISSION OF ULB IS NOT AUTHORIZED AND MAY RESULT IN CRIMINAL AND/OR CIVIL LIABILITY.						CONTRACT NUMBER		500KW, LIQUID COOLED LOAD BANK MODEL: ULB-R500-415-LWT-IS			
						JOB#1352		SIZE D	CAGE CODE 8LKM0	A53001-P51	
						PRODUCT ID -		SCALE -		WEIGHT: 1360 KG	SHEET: 1